



CELSA ATLANTIC SL

10

Certified products

Gecertificeerde producten

Produits certifiés

The validity of the present certificate is confirmed if visible on the OCAB-OCBS website

(www.ocab-ocbs.com)

Check with the QR-code hereunder to download it.



www.ocab-ocbs.com/usbe/a/10.pdf

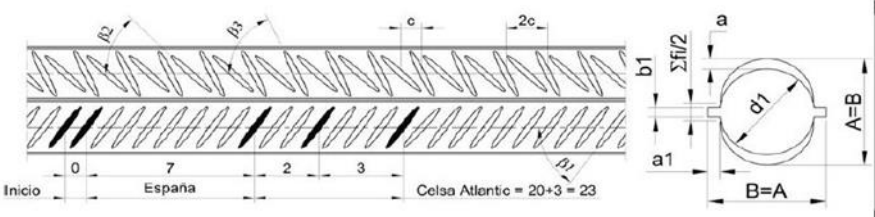
Date of first issue of this certificate: 20170508

Producteur agréé : CELSA ATLANTIC, SL (données du 20170508)

Numéro d'immatriculation : **10**

Lende s/n
 ES – 15145 A LARACHA – A CORUÑA
 ESPAGNE

Phone +34/981 012 620
 Fax +34/981 643 023
 Mail info@celsaatlantic.com
irama@gcelsa.com

<p>LAMINE BE 500 S</p> <p>BARRES Diamètres 8 mm – 32 mm</p> <p>BOBINES Diamètres 8 mm – 16 mm</p>	
--	--

Organisme de vente :

CELSA ATLANTIC, SL

Lende s/n
 ES – 15145 A LARACHA – A CORUÑA
 ESPAGNE

Phone +34/981 012 620
 Fax +34/981 643 023
 Mail info@celsaatlantic.com
irama@gcelsa.com

Erkende Producent: **CELSA ATLANTIC, SL** (gegevens van 20170508)

Immatriculatie nummer: **10**

Lende s/n
ES – 15145 A LARACHA – A CORUÑA
ESPAGNE

Phone +34/981 012 620
Fax +34/981 643 023
Mail info@celsaatlantic.com
irama@gcelsa.com

<p>GEWALST BE 500 S</p> <p>STAVEN Diameter 8 mm – 32 mm</p> <p>BOBIJNEN Diameter 8 mm – 16 mm</p>	<p>The drawing shows a longitudinal view of a reinforcement bar with a diameter of 8 mm. The bar has a longitudinal profile with a diameter of 8 mm and a length of 23 meters. The longitudinal view shows the bar with a diameter of 8 mm and a length of 23 meters. The cross-sectional view shows a circular bar with a diameter of 8 mm and a length of 23 meters. The drawing includes labels for dimensions: β_2, β_3, c, $2c$, b_1, $\Sigma f_i/2$, a, a_1, σ_1, $A=B$, $B=A$. The longitudinal view also shows a scale from 0 to 23 meters, with labels for 'Inicio', 'Espana', and 'Celsa Atlantic = 20+3 = 23'.</p>
--	---

Verkoopsorganisme:

CELSA ATLANTIC, SL

Lende s/n
ES – 15145 A LARACHA – A CORUÑA
ESPAGNE

Phone +34/981 012 620
Fax +34/981 643 023
Mail info@celsaatlantic.com
irama@gcelsa.com